

SEPARATION TECHNOLOGIES

ION EXCHANGE RESINS

DUOLITE A 102 D

PRODUCT DATA SHEET.



DESCRIPTION

DUOLITE A 102 D is a type 2 strong base anion exchange resin.

Its polystyrene matrix is prepared according to a special patented process which gives a homoporous gel structure. DUOLITE A 102 D is characterised by excellent chemical and osmotic stability and good resistance to organic fouling. Its particular use is for water demineralisation when maximum removal of silica is required. The physical & chemical properties are tested by the method specified in IS : 7330-1988.

PROPERTIES

Matrix _____	Polystyrene
Functional groups _____	Quaternary Ammonium, Type 2 Min 95% of TEC
Physical form _____	Cream coloured beads
Ionic form as supplied _____	Cl ⁻
Total exchange capacity _____	Minimum 1.30 eq / L (Cl ⁻ form)
Moisture holding capacity _____	47 - 53 % (Cl ⁻ form)
Specific gravity _____	1.07 to 1.11 (Cl ⁻ form)
Packing density _____	About 700 g / L (Cl ⁻ form)
Particle size _____	0.3 to 1.2 mm
Maximum reversible swelling _____	Cl ⁻ ↔ OH ⁻ : 17 %
Chemical stability _____	Insoluble in water, dilute solutions of acids or bases and common solvents.

* 1 BV (Bed Volume) = 1 m³ solution per m³ resin

Please refer our Technical Data Sheet on Duolite storage and handling instructions for storage of resin.

SUGGESTED OPERATING CONDITIONS

Maximum operating temperature _____	35 °C OH ⁻) 75°C (Cl ⁻)
Minimum bed depth _____	700 mm
Service flow rate _____	5 to 40 BV* / hr
Linear velocity _____	30 m / hr
Regenerant _____	Na OH
Level _____	50 to 100 g / L
Concentration _____	3% to 5 %
Flow rate _____	2 to 8 BV / hr (minimum contact time : 30 minutes)
Slow rinse _____	Minimum 2 BV at regeneration flow rate
Fast rinse _____	Same as service flow rate

* 1 BV (Bed Volume) = 1 m³ solution per m³ resin

Please refer the check list provided for safe operation and longer durability of resin.

AVOID EXCESSIVE REGENERANT TEMPERATURE TO DUOLITE IER FOR LONG & HEALTHY LIFE

APPLICATIONS

The main applications of Duolite A 102 D is in water demineralisation. Duolite A 102 D is recommended for waters having maximum 50% SiO₂ / T.A. ratio. Duolite A 102 D is specially recommended where useful capacity and regeneration cost are important factors.

It has a better regeneration efficiency compared to type 1 resins.

Preference is also given to Duolite A 102 D as polishing treatment if the water to be treated is heavily polluted with organic matter. Duolite A 102 D in Cl⁻ form reduces the alkalinity effectively. In the field of organic matter Duolite A 102 D proves superior to type 1 resins.

HYDRAULIC CHARACTERISTICS

Figure 1 shows the bed expansion of standard Duolite A 102 D, as a function of backwash flow rate and water temperature.

Figure 2 shows the pressure drop data for standard grade Duolite A 102 D, as a function of water flow rate and water temperature. Pressure drop data are valid at the start of the service run with a clear water and a correctly classified bed.

Figure 1

BED EXPANSION


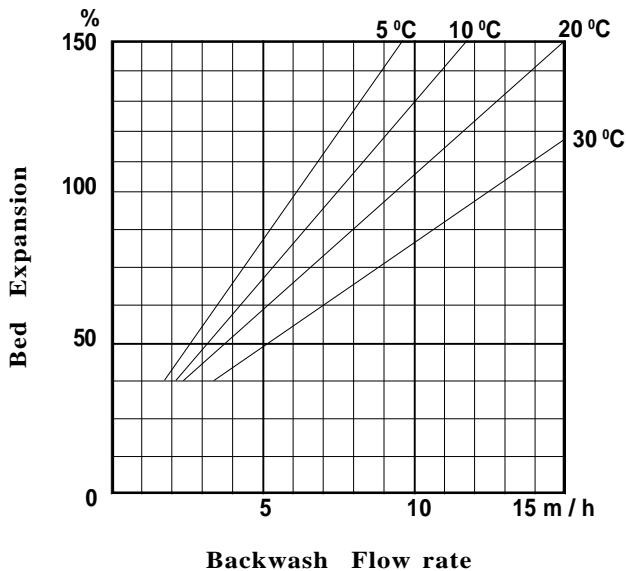


Figure 2

PRESSURE DROP

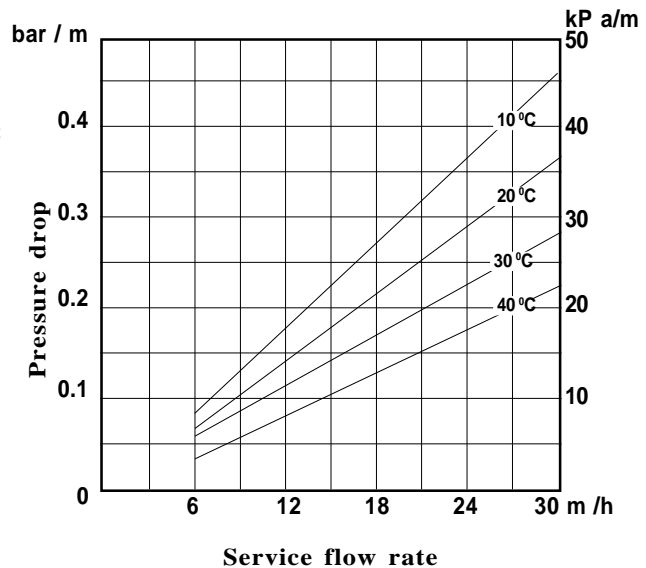

DUOLITE A 102 D

PRODUCT DATA SHEET.

BRANCH OFFICES

14, Shrinivas Society, Ashish Banglow,
New Sharada Mandir Road,
Ahmedabad - 380 00 email -auchtelad1@sancharnet.in
Ph.No.(079) 6620003, Tele fax -6640076.

Shantiniketan Building,
9th Floor, 8, Camac Street,
Calcutta - 700 017
Ph.No.(033) 2424517, 2820183
E-mail - auchtel@cal2.vsnl.net.in

No. 3, Aarti Arcade, 86,
86, Dr. Radhakrishnan Road, Mylapore,
Chennai - 600 004.
Ph.No.(044) 8278352.

Post Box No.12,3/ 64,
Vishnupuri, Nawab Gunj,
Kanpur - 208 002.
Ph.No.(0512) 561540, 561012
E-mail - auchtel@satyam.net.in

K-48, Connaught Circus,
New Delhi - 110 001.
Ph.No.(011) 3328208, 3322116
E-mail - auchtel@del6.vsnl.net.in

The suggestions and data in this bulletin are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use of our products are beyond our control. We recommend that the prospective user determine the suitability of our materials and suggestions before adopting them on a commercial scale. The Company maintains a policy of continuous development and reserve the right to amend any specification without notice. DUOLITE is a trademark of Rohm and Hass Company, Philadelphia, U.S.A. and Auchtel Products Ltd. are users of the same in India.

Auchtel Products Ltd., 142 C, Victor House, N.M. Joshi Marg, Lower Parel(w), Mumbai-400 013
Tel. 91-22-493 3975, Fax. 91-22-493 9755, 497 4211 E-mail -auchtel@vsnl.com